





STATIC REFRIGERATION

MAIN CHARACTERISTICS

MG&MD ICE-CREAM MODULES ARE IN AISI 304 STAIN-LESS STEEL MADE OF SCOTCH BRITE, THEY COULD BE SUPPLY WITH MINIMUM 4 AND MAXIMUM 12 CONTAINERS FOR ROUND ICE-CREAM BOXES, EACH WITH 2 Ø200mm H=240mm ICE-CREAM CONTAINERS INSIDE, SUITABLE BOTH FOR ICE-CREAM AND FOR CRUSHED ICE DRINK. R452A VALVE EVAPORATOR. WITH STATIC REFRIGERATION THROUGH COIL EXPOSED TO GLYCOL. STANDARD SMOOTH WORK SURFACE IN STAINLESS STEEL, WITH OR WITHOUR UPPER GLASS STRUCTURE. ICE-CREAM CASES CAN BE SUPPLY WITH BUILT-IN MOTOR (INTO L=400mm STAINLESS STEEL COMPARTMENT, STANDARD ON THE RIGHT) OR REMOTE MOTOR. THE TEMPERATURE IS CONTROLLED THROUGH ELECTRONIC UNIT. H=150/200mm ADJUSTABLE FEET.

OPTIONALS

- · BUILT-IN MOTOR ON THE RIGHT
- · MOTOR FOR REMOTE CONNECTION BY 5 MT OF DISTANCE
- · COUPLE OF ICE-CREAM ROUND CONTAINERS + LIDS
- · GLYCOL LIQUID IN CONTAINER OF 25 LT


**All rights reserved.

Reserved literary production. It is forbidden to reproduce (even partially) images, texts, prices or technical sheets, without MD&MD srl signed authorization.




STATIC REFRIGERATED VERSION

Α



E

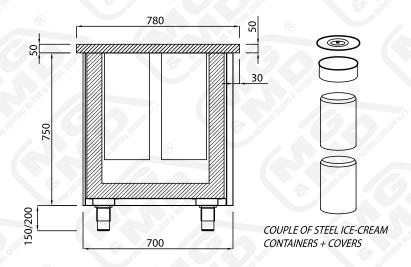

STANDARD HEIGHTS: 750mm STANDARD DEPTHS:700mm

STANDARD LENGTHS: 870mm / 1150mm / 1350mm / 1610mm / 1870mm

FEEDING: 220V./50Hz./1

STATIC REFRIGERATED ICE-CREAM MODULES WITH CONTACT PIPES ON WATER/GLYCOL MIXTURE, -18/-20°C WORKING TEMPERATURE. SUITABLE FOR ICE-CREAM. (THERE IS A DIFFERENCE OF TEMPERATURE, ABOUT 3/4 °C, BETWEEN THE ROUNDED CONTAINER ON THE TOP AND THE CONTAINER ON THE BOTTOM). IT IS POSSIBLE TO REALIZE A BESPOKE VERSIONE WITH BODY H=500mm, FOR SINGLE CONTAINER WITHOUT RESERVE COMPARTMENT BELOW.

| MOTOR | COOLING | PERFORMANCE TO | -25°C: |
|-------|---------|-----------------------|--------|
|-------|---------|-----------------------|--------|


| MODULE 4 CONTAINERS | 500W |
|----------------------------------|------------------------------------|
| MODULE 6 CONTAINERS | 500W |
| MODULE 8 CONTAINERS | 550W |
| MODULE 10 CONTAINERS | 640W |
| MODULE 12 CONTAINERS | 640W |
| ENIVIRONMENTAL CLIMATIC CLASS: 3 | +25°C 60% R H - FN-ISO 23953 - 1/3 |


Due to technical progress, MG&MD reserves the right to change the technical characteristics without notice.





STATIC REFRIGERATED VERSION


FRONTS







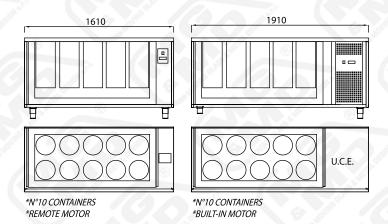

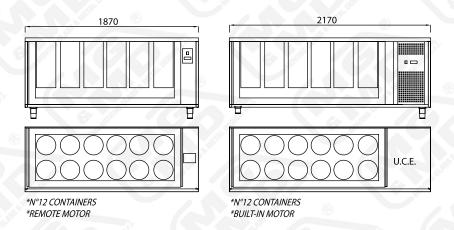



POSSIBLE COUPLING

COATING SOLUTION

EXAMPLE OF COUPLING BETWEEN COUNTERS MOD. "MANHATTAN" FOR PASTRY AND "MODULO GELATERIA" FOR ICE CREAM WITH TRAPS FOR CONTAINING CARAPINE.

THE COUNTERS HAS ALSO BEEN APPLIED THE "LIGHT-BLU" COATING COMPOSED BY VERTICAL STUDS IN POLISHED STAIN-LESS STEEL WITH CORIAN HEEL, WITH FRONT SQUARES IN PLEXIGLASS OPALINE BLUE BACKLIGHT, WITH BOTTOM PANEL COVER BY PVC FILM WITH WHITE STRIPS.

