VISION







> VENTILATED REFRIGERATION

MAIN CHARACTERISTICS

"VISION" REFRIGERATED ROOM IS PARTICULARLY SUITABLE FOR STORAGE AND DISPLAY PORK PRODUCTS AND CHEESES, IT'S COMPLETELY OVERVIEW AND IT FIND ITS DISPLAY IN THE MIDDLE OF THE SUPERMARKET, SURROUNDED BY REFRIGERATED COUNTERS. ITS FRONTAL OPENING SYSTEM BY 2 SLIDING DOORS IN EXTRALIGHT TEMPERED DOUBLE-GLAZING DOORS, WITH AUTOMATIC CLOSING SUPPORTED BY VERNISHED BLACK STUDS IN ALUMINIUM, BACK AND SIDES IN DOUBLE-GLAZING (OR STAINLESS STEEL ON REQUEST). FOR THE TRANSPORTATION AND THE INSTALLATION.

OPTIONALS

- BACK AND / OR SIDES IN STAINLESS STEEL FOR WALL
 PLACING.
- BUILT-IN MOTOR CONNECTED ON THE ROOM TOP
- MOTOR FOR REMOTE CONNECTION BY 10 MT OF DI-STANCE.
- SHELVING WITH N. 6 SHELVES IN NATURAL BEECHWO-OD L=1350 X 600 TO BE PLACED INSIDE THE REFRIGE-RATED ROOMS (N.2 X EACH ROOM)
- · BOTTOM IN BLACK PHENOLIC
- · LED LIGHTING WITH VERTICAL TUBES

**All rights reserved.


Reserved literary production. It is forbidden to reproduce (even partially) images, texts, prices or technical sheets, without MD&MD srl signed authorization.


VISION



VENTILATED REFRIGERATED VERSION

> A

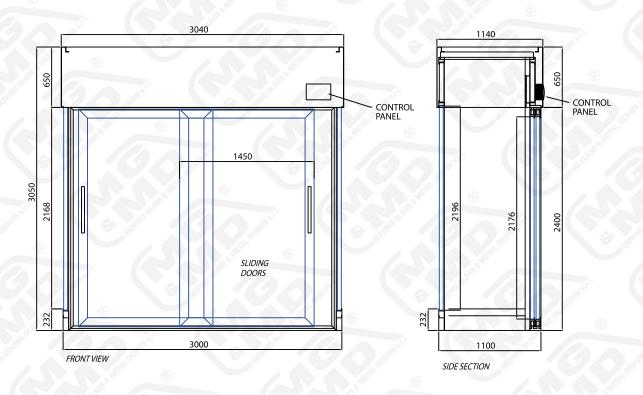

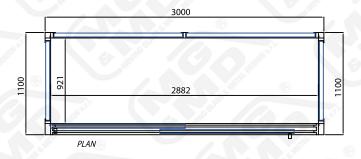

TANK DEPTH: 1100mm

STANDARD LENGTHS: 3000mm

FEEDING: 220V./50Hz./1

REFRIGERATED VENTILATED ROOM WITH 2 R134A EVAPORATORS CONNECTED ALONGSIDE WITH A CONNECTOR AND FIXED ON THE TOP, ELECTRICAL DEFROSTING, AUTOMATIC TEMPORIZED AIR RECYCLE, PREPARED FOR THE ELECTRIC PANEL TO BE INSERTED, WITH ELECTRONICAL DISPLAY ON TOP OR REMOTE. WORKING TEMPERATURE +4 / +8°C.

IT IS POSSIBLE TO REALIZE "VISION" ROOMS WITH PERSONALIZED SIZES AS LENGTH AND WIDTH.

MOTOR COOLING PERFORMANCE TO -10°C:

L= 3000mm	2660 W
ENVIRONMENTAL CLIMATIC CLASS: 3	+25°C 60% R.H EN-ISO 23953 - 1/2

Due to technical progress, MG&MD reserves the right to change the technical characteristics without notice.